




Pago Oprolsystemen

sales@aben.eu

www.haspel.expert

-

Technische specificaties - Caractéristiques techniques - Technical specifications - Technische Daten

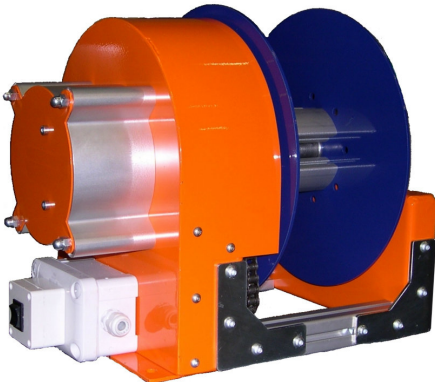

RRK-7018

Description	cable reel
Type of reel	Cable reel
Number of contacts	5
Conductor cross-section (mm²)	6
Length (m)	>60-100
winding length cable max (m)	100
Max Volt (V)	630
Max Amp (A)	60
Cable mounted	no
Cable Type	not applicable
Drive	electric motor 24VDC
Ratched Lock	no
IP Class	IP65
Material	steel
Model	open
Power (wound up)-(Watt)	25000
Power (unwound)-(Watt)	30000
Temperture (°C)	-5/40
Application	industrial
Thermic protection	no
overhang (m)	
Cable guide	option
Movement of reel	moving fixed
Finishing	powder coating
Color	red (RAL 3003)
Number of Cycle	20000
External cable diameter (mm)	notapplicable
Height(mm)	413
Width(mm)	775
Depth(mm)	400
Kg	30
Cable end	not applicable
Installation Position	1-5

RRK7018